




船用搭焊钢法兰(四进位) GB 2506-89
Marine lap welded steel flanges(quaternary)

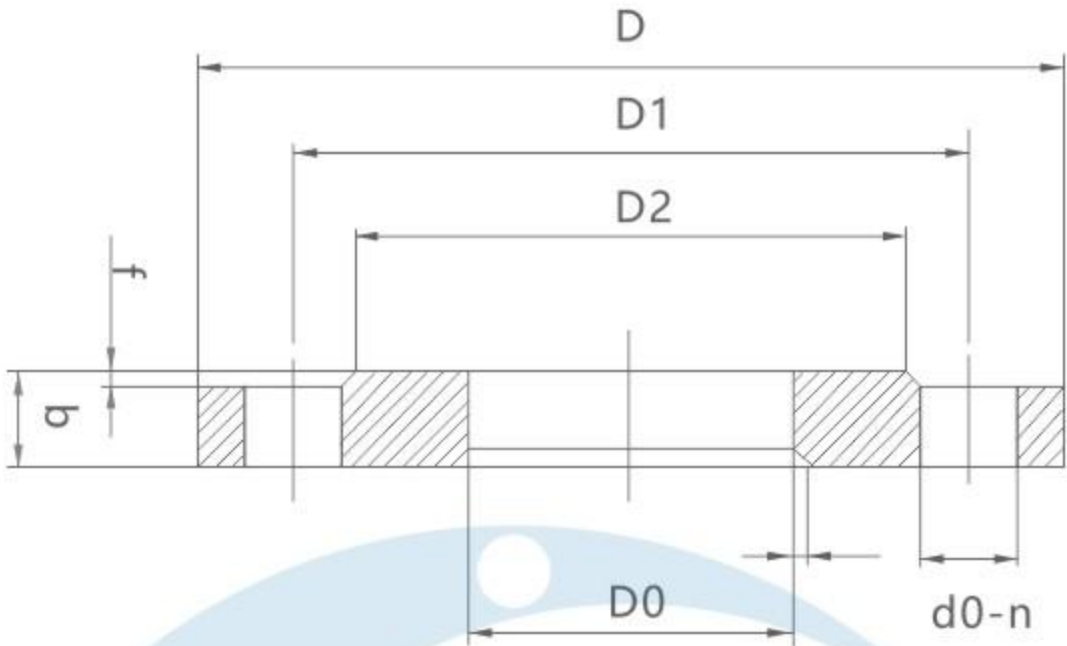

(mm)

公称压力 PN Mpa	公称 口径 DN	管子外径DW		法兰				密封面		焊缝高度与倒角边宽 k	端距 h	螺栓螺纹及通孔			重量 kg			
		第一系列	第二系列	D	D1	D0	b	D2	f			Th.	d0	n(个)				
0.25、 0.6	10	17.2	17	75	50	18	12	35	2	3	4	M10	11	4	0.31			
	15	21.3	22	80	55	23		40							0.35			
	20	26.9	27	90	65	28	14	50							0.53			
	25	33.7	34	100	75	35		60							0.64			
	32	42.4	42	120	90	43	16	70	4	5	M12	14	1.08					
	40	48.3	48	130	100	49		80					1.19					
	50	60.3	60	140	110	61		90					1.31					
	65	76.1	76	160	130	77.5		110					1.64					
	80	88.9	89	190	150	90.5	18	128	3	5	M16	18	2.01					
	100	114.3	114	210	170	116		148					3.71					
	125	139.7	140	240	200	142	20	178					3	6	M16	18	3.90	
	150	168.3	168	265	225	170		202									4.32	
	175	193.7	194	295	255	196	22	232	4	6	M20	22					5.82	
	200	219.1	219	320	280	221.5		258									6.31	
	225	-	245	345	305	248	24	282					5	7	M24	26	6.85	
	250	273		375	335	276.5		312									8.43	
	300	323.9	325	440	395	328.5	26	365	6	9	M27	30					10.60	
	350	355.6	377	490	445	360 381		415									15.47	
	400	406.4	426	540	495	410 430		28					465	7	10	M27	30	18.48
	450	457	480	595	550	462 485		520					23.03					
0.25	500	508	530	645	660	513 535	30	570	8	9	M24	26	20	24.05				
	600	610	630	755	705	615 635	32	670					9	10	M27	30	20	32.07
	700	711	-	860	810	由用户 提供	34	775	10	11	M27	30					24	-
	800	813		975	920			880					11	12	M27	30	28	-
	900	914	1075	1020	980		12	13	M27	30	32	-						
	1000	1016	-	1175	1120						1080	13	14	M27	30	36	-	
	1200	1220		1375	1320		1280	14	15	M27	30					40	-	
	1400	1420	1575	1520	1480		15					16	M27	30	44	-		
	1600	1620	-	1790	1730			1690	16	17	M27				30	48	-	
	1800	1820		1990	1930		1890	17				18	M27	30		52	-	
2000	2020	-	2190	2130	2090		56		-									

公称 压力 PN Mpa	公称 口径 DN	管子外径DW		法兰				密封面		焊缝高 度与倒 角边宽 k	端距 h	螺栓螺纹及通孔			重量 kg	
		第一 系列	第二 系列	D	D1	D0	b	D2	f			Th.	d0	n(个)		
0.6	600	610	630	755	705	615	635	38	670	5	8	9	M24	26	20	38.71
	700	711	-	860	810	由用户 提供	42	775	24						-	
	800	813		46	880		M27	30								28
	900	914	1075	1020	50				980		M30	33	32			
	1000	1016	1175	1120	56		1080	11	12					M33	36	40
	1200	1220	1405	1340	64		1295				12	13	M36			
	1400	1420	1630	1560	76		1510									
	1600	1620	1830	1760	84		1710									
	1800	1820	2045	1970	94		1920									
1.0、 1.6	10	17.2	17	90	60	18	14	42	2	3	4	M12	14	4	0.53	
	15	21.3	22	95	65	23		47							0.59	
	20	26.9	27	105	75	28		58							0.84	
	25	33.7	34	115	85	35		68							1.09	
	32	42.4	42	140	100	43	16	78	3	4	5	M16	18	8	1.81	
	40	48.3	48	150	110	49		88							2.05	
	50	60.3	60	165	125	61	18	102	5	6	M20	22	8	2.42		
	65	76.1	76	185	145	77.5		122						2.96		
	80	88.9	89	200	160	90.5	20	133	6	7	M24	26	16	3.21		
	100	114.3	114	220	180	116		158						4.01		
	125	139.7	140	250	210	142	22	184	7	8	M27	30	20	4.90		
	150	168.3	168	285	240	170		212						6.50		
1.0	175	193.7	194	315	270	196	24	242	4	6	7	M20	22	8	7.72	
	200	219.1	219	340	295	221.5		268							8.53	
	225	-	245	370	325	248	26	295	5	6	M24	26	12	9.73		
	250	273		395	350	276.5		320						10.94		
	300	323.9	325	445	400	328.5	32	370	6	7	M27	30	16	12.31		
	350	355.6	377	505	460	360		381						430	19.02	
	400	406.4	426	565	515	410	430	32	482	7	8	M24	26	20	25.95	
	450	457	480	615	565	462	485	35	532						31.01	
	500	508	530	670	620	513	535	38	585	8	9	M27	30	20	38.27	
	600	610	630	780	725	615	635	48	685						59.36	
1.6	200	219.1	219	340	295	221.5	26	268	3	6	7	M20	22	12	9.06	
	225	-	245	370	325	248		27							295	10.76
	250	273		405	355	276.5		29							320	13.21
	300	323.9	325	460	410	328.5	32	370	7	8	M24	26	16	17.40		
	350	355.6	377	520	470	360	381	36						430	27.91	
	400	406.4	426	580	525	410	430	40						482	9	10
	450	457	480	640	585	462	485	46	532	48.33						
	500	508	530	715	650	513	535	52	585	10	11	M30	33	20	69.15	
	600	610	630	840	770	615	635	60	685						105.35	